


## Sight Glass Flow Indicator

<b>Product Type</b>	:SG-YL11-077
<b>Product Sizes</b>	:DN6 to DN50(1/8”Inch to 2”Inch)
<b>Material of Construction</b>	
<b>Body&amp;Cap</b>	:SS304 / SS316 / SS316L,Brass,Carbon Steel
<b>Sealing O-Ring</b>	:PTFE(White)/NBR(Black)/Viton(Black)
<b>Sight Glass</b>	:Tempered Glass/Quartz Glass
<b>Impeller/Rotor</b>	:Plastic(Red)/PTFE(Red)
<b>Connection Way</b>	:NPT,BSPP,BSPT Female Thread
<b>Max. Working Temperature</b>	:100°C / 212°F for Plastic Impeller&NBR or NBR O-Ring 200°C / 392°F for PTFE Impeller&O-Ring
<b>Max. Operating Pressure</b>	:0.6MPa / 6Bar / 87PSI(Up to 1.6MPa Customization)
<b>Compatible Medium</b>	:Water / Oil / Gas / Air / Liquids

LSMSFI

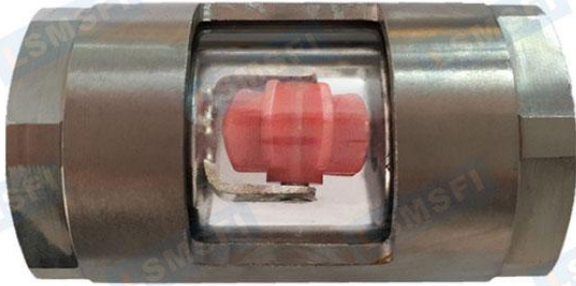

Wenzhou Luosimeng Machinery Co.Ltd.

LSMSFI



Wenzhou Luosimeng Machinery Co.Ltd.

LSMSFI



Wenzhou Luosimeng Machinery Co.Ltd.

LSMSFI



Wenzhou Luosimeng Machinery Co.Ltd.

**Wenzhou Luosimeng Machinery Co.,Ltd.**  
(Sight Flow Indicator Manufacturer)

Tel.:+86-577-86896383      Fax:+86-577-86998170      Mobile:+86-13091902237      Factory:102nd&201st Room,19th Building,No. 696,5th Binhai Road,Economic  
and Technological Developme Zone Wenzhou,Zhejiang P.R.China

Web:www.rosemoun.com