

Propeller Water Flow Indicator

| | |
|---------------------------------|---------------------------------------------------------------------------------------------------|
| Product Type | :SG-YL11-20 |
| Product Sizes | :DN32 to DN50(1 1/4”Inch to 2”Inch) |
| Material of Construction | |
| Body&Cap&Pole | :SS304 / SS316 / SS316L or Carbon Steel(WCB) |
| Sealing Gasket | :PTFE(White)/NBR(Black)/Viton(Black) |
| Sight Glass | :Tempered/Borosilicate/Quartz/Aluminosilicate Glass |
| Impeller/Rotor | :Plastic (Red) or PTFE (Red or Blue) |
| Connection Way | :NPT,BSPP,BSPT Female Thread |
| Max. Working Temperature | :100°C / 212°F for Plastic Impeller&NBR or Viton Gasket 200°C / 392°F for PTFE Impeller&Gasket |
| Max. Operating Pressure | :1.6MPa / 16Bar / 232PSI (Up to 5.0MPa Customization) |
| Compatible Medium | :Water / Oil / Gas / Air / Liquids |




Wenzhou Luosimeng Machinery Co.Ltd.



Wenzhou Luosimeng Machinery Co.Ltd.



Wenzhou Luosimeng Machinery Co.Ltd.

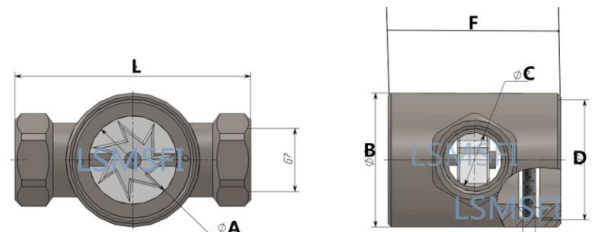

| | | | | | | | | |
|---------|----------|---------|---------|---------|---------|--------|----------|--------|
| G 1/4 | L: 90mm | A: 35mm | B: 53mm | C: 11mm | D: 47mm | E: 8mm | F: 62mm | 0.63Kg |
| G 3/8 | L: 90mm | A: 35mm | B: 53mm | C: 15mm | D: 47mm | E: 8mm | F: 62mm | 0.61Kg |
| G 1/2 | L: 90mm | A: 35mm | B: 53mm | C: 19mm | D: 47mm | E: 8mm | F: 62mm | 0.59Kg |
| G 3/4 | L: 94mm | A: 35mm | B: 53mm | C: 24mm | D: 47mm | E: 8mm | F: 62mm | 0.62Kg |
| G 1 | L: 100mm | A: 35mm | B: 53mm | C: 30mm | D: 47mm | E: 8mm | F: 62mm | 0.67Kg |
| G 1 1/4 | L: 110mm | A: 44mm | B: 66mm | C: 39mm | D: 56mm | E: 8mm | F: 77mm | 1.17Kg |
| G 1 1/2 | L: 124mm | A: 50mm | B: 70mm | C: 45mm | D: 60mm | E: 8mm | F: 92mm | 1.42Kg |
| G 2 | L: 160mm | A: 63mm | B: 85mm | C: 57mm | D: 75mm | E: 8mm | F: 103mm | 2.11Kg |



Wenzhou Luosimeng Machinery Co.,Ltd.
(Sight Flow Indicator Manufacturer)