

## LSMSFI Water Flow Indicator

|                                 |   |
|---------------------------------|---|
| <b>Product Type</b>             | :SG-YL11-206  |
| <b>Product Sizes</b>            | :DN8 to DN50(1/4”Inch to 2”Inch)  |
| <b>Material of Construction</b> |   |
| <b>Body&amp;Cap&amp;Bolt</b>    | :SS304 / SS316 / SS316L or Carbon Steel(WCB)  |
| <b>Sealing Gasket</b>           | :PTFE(White)/NBR(Black)/Viton(Black)/   |
| <b>Sight Glass</b>              | :Tempered/Borosilicate/Quartz/Aluminosilicate Glass   |
| <b>Impeller/Rotor</b>           | :Plastic (Red) or PTFE (Red or Blue)  |
| <b>Connection Way</b>           | :NPT,BSPP,BSPT Female Thread  |
| <b>Max. Working Temperature</b> | :100°C / 212°F for Plastic Impeller&NBR or Viton Gasket<br>200°C / 392°F for PTFE Impeller&Gasket |
| <b>Max. Operating Pressure</b>  | :1.6MPa / 16Bar / 232PSI (Up to 5.0MPa Customization)   |
| <b>Compatible Medium</b>        | :Water / Oil / Gas / Air / Liquids etc  |




Wenzhou Luosimeng Machinery Co.Ltd.



Wenzhou Luosimeng Machinery Co.Ltd.



Wenzhou Luosimeng Machinery Co.Ltd.

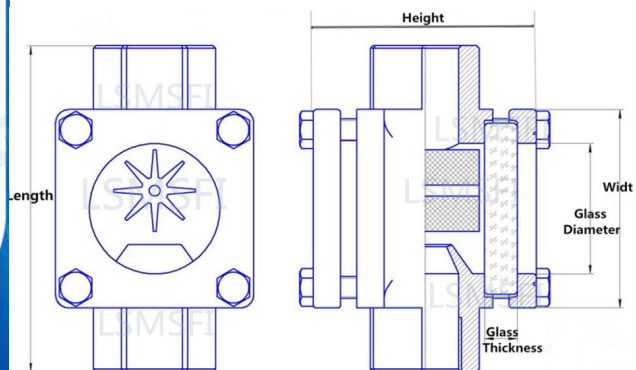

**Wenzhou Luosimeng Machinery Co.,Ltd.**  
(Sight Flow Indicator Manufacturer)