

## Welded Flange Sight Glass

<b>Product Type</b>	:SG-002
<b>Product Sizes</b>	:DN15 to DN200(1/2”Inch to 8”Inch)
<b>Material of Construction</b>	
<b>Body&amp;Cap&amp;Bolts</b>	:SS304 / SS316 / SS316L or Carbon Steel(WCB)
<b>Sealing O-Ring</b>	:PTFE(White/Green)/NBR(Black)/Viton(Black)
<b>Window</b>	:Tempered/Borosilicate/Quartz/Aluminosilicate Glass
<b>Assemble Method</b>	:ANSI 150LB,JIS 5K,DIN,Gost,Factory Design Flange
<b>Connection Way</b>	:Butt Weld/Socket Weld
<b>Max. Working Temperature</b>	:100°C / 212°F for Viton or NBR Gaskets 200°C / 392°F for PTFE Gaskets
<b>Max. Operating Pressure</b>	:0.6MPa/6Bar/87PSI (Up to 1.6MPa Customization)
<b>Compatible Medium</b>	:Water / Oil / Gas / Air / Liquids etc




Wenzhou Luosimeng Machinery Co.Ltd.



Wenzhou Luosimeng Machinery Co.Ltd.



Wenzhou Luosimeng Machinery Co.Ltd.

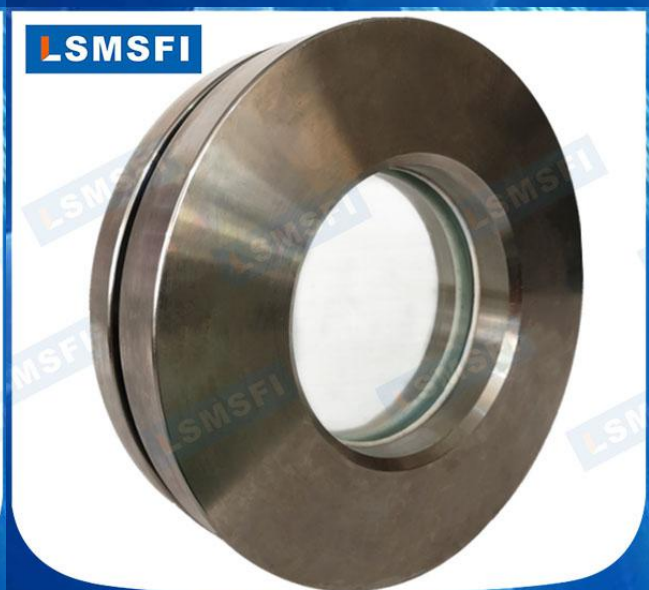

Wenzhou Luosimeng Machinery Co.Ltd.

**Wenzhou Luosimeng Machinery Co.,Ltd.**  
(Sight Flow Indicator Manufacturer)