

PTFE Lining Flanged Sight Glass

| | |
|--|---|
| Product Type | :SG-ZT300 |
| Product Sizes | :DN15 to DN300(1/2" Inch to 12" Inch) |
| Material of Construction | |
| Body&Flange&Link&Bolt | :SS304 / SS316 / SS316L, Carbon Steel(WCB) |
| Sealing Gasket | :PTFE(White)/NBR(Black)/Viton(Black) |
| Window | :Tempered Glass/Quartz Glass |
| Lined Material | :PTFE(White)/PFA(White) |
| Connection Way | :ANSI 150LB/300LB, JIS 5K/10K, DIN, GB Flange |
| Max. Working Temperature | :100°C / 212°F for NBR or Viton Gasket 200°C / 392°F for PTFE Gasket |
| Max. Operating Pressure | :0.6MPa / 6Bar /87PSI |
| Compatible Medium | :Water / Oil / Gas / Air / Liquids |

LSMSFI

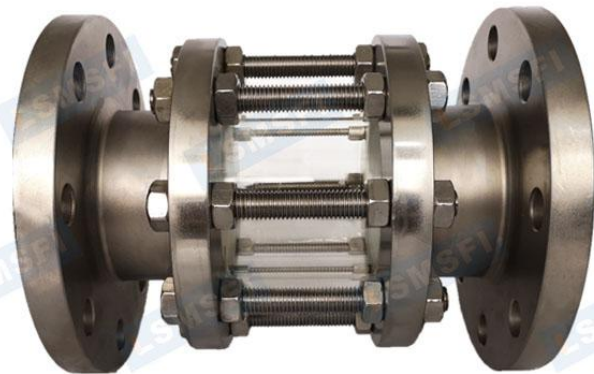
Wenzhou Luosimeng Machinery Co.Ltd.

LSMSFI

Wenzhou Luosimeng Machinery Co.Ltd.

LSMSFI

Wenzhou Luosimeng Machinery Co.Ltd.

LSMSFI

Wenzhou Luosimeng Machinery Co.Ltd.

Wenzhou Luosimeng Machinery Co.,Ltd.
(Sight Flow Indicator Manufacturer)